


# DURA-FLEX®

## TYPE W POWER CABLE

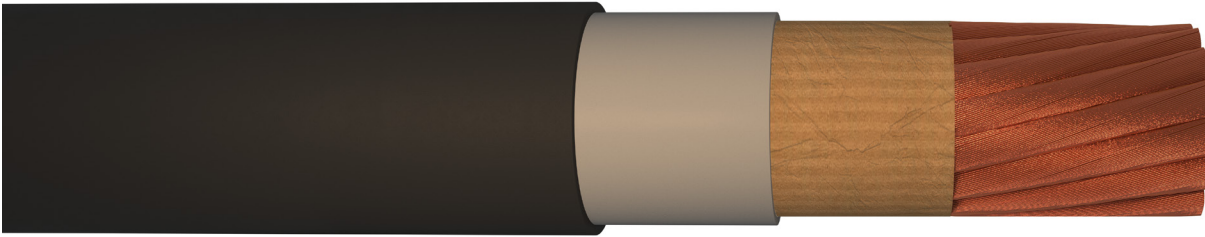

### Applications

Direct's Dura-Flex® Type W is an industrial grade, portable power cable primarily used for permanent or temporary power supply. Durable and versatile, the cable is also commonly deployed for heavy-use applications, including rental, mining, A/C systems, and motor battery leads. Dura-Flex is UL and cULus listed, CSA approved, RoHS compliant, and manufactured in the USA.

### Construction

- Rope-lay, bunch-stranded 30 AWG copper conductor; bare ASTM Class K copper
- Separators: paper (conductor) and mesh (insulation)
- Insulated with LSHF EPDM compound
- Jacketed with proprietary CPE compound

See reverse for technical specifications

DURA-FLEX | TYPE W POWER CABLE

AWG SIZE	STRANDING	INSULATION THICKNESS		OUTSIDE DIAMETER		AMPACITY <sup>1</sup>	LBS PER 1,000'
	/ DIAM (OR) GA	INCHES	MM	INCHES	MM		
#6	273 / 30	.095	2.41	.503	12.78	105 A	188
#4	429 / 30	.095	2.41	.549	13.94	140 A	253
#2	676 / 30	.095	2.41	.620	15.75	190 A	350
#1	845 / 30	.095	2.41	.688	17.48	220 A	436
1 / 0	1,066 / 30	.095	2.41	.740	18.80	260 A	523
2 / 0	1,339 / 30	.095	2.41	.794	20.17	300 A	631
3 / 0	1,677 / 30	.095	2.41	.830	21.08	350 A	740
4 / 0	2,109 / 30	.095	2.41	.906	23.01	405 A	908

<sup>1</sup>Allowable ampacity per NFPA 70 / NEC Article 400. Values are based on ambient temperature of 30°C.



# DURA-FLEX<sup>®</sup> TYPE W POWER CABLE

## TECHNICAL SPECIFICATIONS

### Construction

Conductors	<ul style="list-style-type: none"><li>Rope-lay, bunch-stranded 30 AWG copper conductor; bare ASTM Class K copper</li></ul>
Voltage Rating	<ul style="list-style-type: none"><li>600 V; 2,000 V</li></ul>
Insulation & Jacket	<ul style="list-style-type: none"><li>Separators: paper (conductor) and mesh (insulation)</li><li>Insulated with low-smoke, halogen-free EPDM compound</li><li>Jacketed with proprietary CPE compound</li><li>Resistant to abrasion, crushing force, extreme temperatures, flame, impact, oil, sunlight, and water</li><li>UL tested 60°C (140°F) oil resistant temperature rating</li><li>UL tested 720 hours sunlight resistance rating</li></ul>
Temperature Range	<ul style="list-style-type: none"><li>-40°C (-40°F) to 90°C (194°F) Dry; 90°C (194°F) Wet</li></ul>

### Standards & Certifications

Industry Approvals	<ul style="list-style-type: none"><li>UL 44, 1650, and 2556</li><li>cULus Listed</li><li>CSA C22.2 No. 96 and No. 2556</li><li>ASTM B3, B49, and B172</li><li>MSHA Approved</li><li>FT-1, FT-2, and FT-5</li><li>RHH / RHW / RHW-2</li><li>RoHS Compliant</li></ul>
--------------------	---

### Standard Stock

Available Lengths	<ul style="list-style-type: none"><li>Coils/Assemblies at 25', 50', and 100'</li><li>Reels at 250', 500', 1,000', and 2,500'</li><li>Custom lengths available upon request</li></ul>
-------------------	--

### Customization

Jacket Colors	<ul style="list-style-type: none"><li>● Black (standard) ● Blue ● Brown ● Green ● Orange ● Red ○ White ● Yellow</li></ul>
Marking Options	<ul style="list-style-type: none"><li>Quick Print<sup>®</sup>; Surface Print; Indent Print; Sequential Marking; Color Stripe</li></ul>

